



VERSATILE ENOUGH TO BECOME YOUR GLOBAL STANDARD

The Roto-Bin-Dicator is the most universal of all level sensing technologies and is the most popular level switch used in dry bulk materials. The Roto-Bin-Dicator is a rotating paddle type, bulk material level sensor offered with a wide variety of paddle options for unequalled application versatility. It is easy to install and requires no special tools or calibration.

FEATURES AND BENEFITS

- A simple, mechanical mechanism means no calibration is required for quick installation
- Long-lasting, sealed motor keeps maintenance and replacement costs low
- External Indicator Lights to communicate functionality of the unit
- Extensive Paddle Options to adapt to a variety of applications
- Adjustable Time Delay is field selectable to modify if the application needs change.
- An external function test using the Test FOB allows a check of the unit without having to remove the cover.
- For added security, Fail-Safe Selection is available
- Frame designed to enable connection flexibility
 - Imperial or Metric conduit entry options
 - Process Fitting can be made to fit any connection

SPECIFICATIONS

FUNCTIONAL

Power Requirements	Super-Safe: 24 VDC Super-Safe Plus: 120/240 VAC; 50/60 Hz
Power Consumption	7 watts
Motor	Super-Safe: 1 rpm; Super-Safe Plus: 1 rpm
Fuse	1/8 amp internally fused
Contact Ratings	Level Alarm: Super-Safe: DPDT, 5A @ 277 VAC, 5A @ 30 VDC; Super-Safe Plus: SPDT 10A @ 125 VAC, 6A @ 277 VAC, 5A @ VDC Failure Indication: Super-Safe NA; Super-Safe Plus: SPDT, 0.6 amp @ 125 VAC
Fail-Safe Circuitry	Low or high level field selectable
Process Temperature	-20° to 302° F (-29° to 150° C) Standard Up to 500° F (Up to 260° C) with Extension 3 and Lag
Time Delay	Super-Safe: 3 to 10 seconds; Super-Safe Plus: 3 to 30 seconds

PHYSICAL

Drive Shaft Assembly	Precision machined shaft with two shielded ball bearings
Shaft Seal	Teflon®/Viton® Lipseal rated 1/2 micron at 30 psi (2.1 kg/cm²) at 400° F (204° C)
Housing and Cover	Type 4X/IP66; Polyester-coated aluminum casting
Mounting Plate	8" outside diameter with 1 1/4" NPT pipe threaded coupling; standard polyester coated mild steel; optional 304 stainless steel; H-19 Half Coupling; H-192 Full Coupling
Conduit Entry	3/4" NPT or M20 x 1.5
Rigid Shaft and Paddle	Metal parts of all designs are 316 stainless steel
Flex Shaft	Either Neoprene, 155° F (68° C) or Silicone, 400° F (204° C) coatings
Pulse Wheel	Multi-toothed pulse wheel with an opti-reflective circuit
External Lights	Green (power/diagnostics) and red (alarm/diagnostics) lights
Shipping Weight	Aluminum housing 10 lbs (4.5 kg); stainless steel housing 16 lbs (7.3 kg)

SUPER SAFE ROTO-BIN-DICATOR - ORIGINAL - PART ONE

POWER PACK OPTIONS

COMPLETE CONFIGURATION

Process Fitting

X1 = Aluminum Frame Neck, NPT 1-1/4"
X2 = 304 Stainless Steel Frame Neck, NPT 1-1/4" (Note 12)
C2 = 316 Stainless Steel NPT 1-1/4"
D2 = 316 Stainless Steel NPT 1-1/2"
E2 = 316 Stainless Steel BSP Tapered R 1-1/4"
F2 = 316 Stainless Steel BSP Tapered R 1-1/2"
J2 = 316 Stainless Steel BSP Straight G 1-1/4" (Note 11)
K2 = 316 Stainless Steel BSP Straight G 1-1/2" (Note 11)
M2 = 316 Stainless Steel Tri-Clamp 1-1/2" (Note 13)
N2 = 316 Stainless Steel Tri-Clamp 2" (Note 13)

Housing Finish

A = Powder Coated Aluminum
B = 304 stainless steel (Note 2, 3, 12)
C = Epoxy Painted Aluminum
D = Electroless Nickel Plated Aluminum (Note 2)

Ordinary Location

Super-Safe Roto-Bin-Dicator
RSS3GH = 24 VDC, DPDT
RSS3GHM = 24 VDC, DPDT, Metric
Super-Safe Plus Roto-Bin-Dicator
RSSP1GH = 120 VAC, 2SPDT
RSSP1GHM = 120 VAC, 2SPDT, Metric
RSSP2GH = 240 VAC, 2SPDT
RSSP2GHM = 240 VAC, 2SPDT, Metric


Note 1. For PowerPack ordering: for powder coated aluminum and 1-1/4 in. NPT order by model number only.

Hazardous Location

Super-Safe Roto-Bin-Dicator
RSS3XH = 24 VDC, DPDT
RSS3XHM = 24 VDC, DPDT, Metric with ATEX and IEC Approvals
Super-Safe Plus Roto-Bin-Dicator
RSSP1XH = 120 VAC, 2SPDT
RSSP1XHM = 120 VAC, 2SPDT, Metric with ATEX and IEC Approvals
RSSP2XH = 240 VAC, 2SPDT
RSSP2XHM = 240 VAC, 2SPDT, Metric with ATEX and IEC Approvals

Note 14: For Hazardous Location models that require extended ambient temperature -40° to 113°F (-40° to 45°C), add suffix 'T' to model number.
Example: RSS3XHT

ROTO-BIN-DICATOR - ORIGINAL - PART TWO

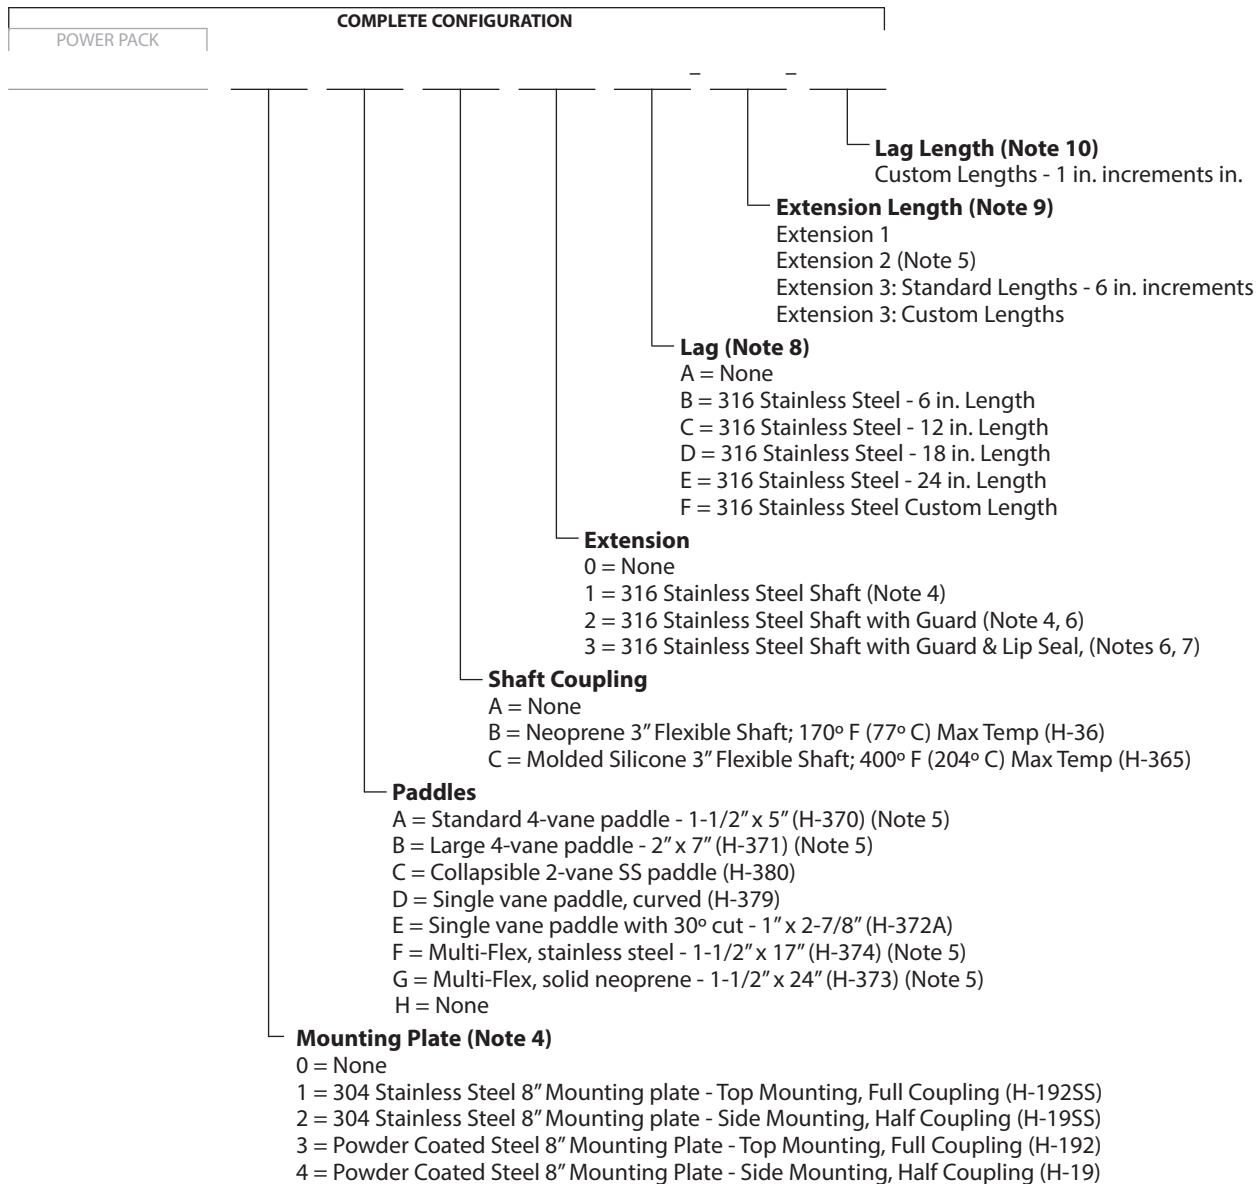

Notes:

- Hazardous location approval not available with stainless steel Housing Finish or electroless nickel plated aluminum Housing Finish
- Function Test FOB not available with stainless steel Housing Finish
- For Mounting Plates Process Fitting must be X1, X2, or C2. Extensions 1 and 2 must use Mounting Plate 1 or 3 (Top Mounted)
- Mounting plate is required.
- Shaft guard length will be 2 in. (5 cm) shorter than extension length unless otherwise noted
- Process Fitting cannot be X1 or X2 and maximum length is 36 in. (91 cm) and if used with Extension, the maximum total length is 48 in. (122 cm)
- Lag not available with process fitting X1 or X2, and if used with Extension, the maximum total length is 48 in. (122 cm)
- Maximum extension length is 180 in. (4.6 m), minimum length is 3 in. (7.6 cm); leave blank if not used.
- Maximum lag length is 24 inches, minimum length 1 in. (2.5 cm); leave blank if not used
- EPDM Flat gasket is included for Process Fittings with straight threads.
- X2 Process Fitting and Stainless Steel Housing Finish can only be ordered together.
- M2 and N2 Process Fitting only available with C, D, E, F and G Paddles.

