



VERSATILE ENOUGH TO BECOME YOUR GLOBAL STANDARD

The Roto-Bin-Dicator is the most universal of all level sensing technologies and is the most popular level switch used in dry bulk materials. The Roto-Bin-Dicator is a rotating paddle type, bulk material level sensor offered with a wide variety of paddle options for unequaled application versatility. It is easy to install and requires no special tools or calibration.

FEATURES AND BENEFITS

- A simple, mechanical mechanism means no calibration is required for quick installation
- Long-lasting, sealed motor keeps maintenance and replacement costs low
- Extensive Paddle Options to adapt to a variety of applications
- Frame designed to enable connection flexibility
 - Imperial or Metric conduit entry options
 - Process Fitting can be made to fit any connection

SPECIFICATIONS

FUNCTIONAL

Power Requirements	24/120/240 VAC; 50/60 Hz, 24 VDC
Power Consumption	5 watts
Motor	1 rpm
Fail-Safe Circuitry	Low level fail safe
Switch Rating	General Purpose: SPDT 20A @ 125/250/480 VAC. Pilot Duty: 345 VA, 115 VAC; 690 VA, 230 VAC
Process Temperature	-20° to 302° F (-29° to 150° C) Standard Up to 500° F (Up to 260° C) with Extension 3 and Lag

PHYSICAL

Drive Shaft Assembly	Precision machined shaft with two shielded ball bearings
Shaft Seal	Teflon®/Viton® Lipseal rated 1/2 micron @ 30 psi (2.1 kg/cm ²) @ 400° F (204° C)
Housing and Cover	Type 4X/IP66 polyester coated aluminum casting
Mounting Plate	8" outside diameter with 1 1/4" NPT pipe threaded coupling; standard polyester coated mild steel; optional 304 stainless steel; H-19 Half Coupling; H-192 Full Coupling
Conduit Entry	3/4" NPT or M20 x 1.5
Rigid Shaft and Paddle	Metal parts of all designs are 316 stainless steel
Flex Shaft	Available in neoprene, 155° F (68° C) or silicone, 400° F (204° C) coatings
Shipping Weight	Aluminum housing 10 lbs (4.5 kg) Stainless steel housing 16 lbs (7.3 kg)

NOTE. Consult Factory where the housing temperature will be above 200° F (93° C). Shaft extensions and guards are available in galvanized or 316 SS. The Roto-Bin-Dicator® is also available with the Super-Safe-Plus option.

Original Roto-Bin-Dicator®

ROTO-BIN-DICATOR - ORIGINAL - PART ONE

POWER PACK OPTIONS

COMPLETE CONFIGURATION

Process Fitting

X1 = Aluminum Frame Neck, NPT 1-1/4"
X2 = 304 Stainless Steel Frame Neck, NPT 1-1/4" (Note 12)
C2 = 316 Stainless Steel NPT 1-1/4
D2 = 316 Stainless Steel NPT 1-1/2"
E2 = 316 Stainless Steel BSP Tapered R 1-1/4"
F2 = 316 Stainless Steel BSP Tapered R 1-1/2"
J2 = 316 Stainless Steel BSP Straight G 1-1/4" (Note 11)
K2 = 316 Stainless Steel BSP Straight G 1-1/2" (Note 11)
M2 = 316 Stainless Steel Tri-Clamp 1-1/2" (Note 13)
N2 = 316 Stainless Steel Tri-Clamp 2" (Note 13)

Housing Finish

A = Powder Coated Aluminum
B = 304 stainless steel (Notes 2, 3, 12)
C = Epoxy Painted Aluminum
D = Electroless Nickel Plated Aluminum (Note 2)

Model (Note 1)

Ordinary Location

Standard Roto-Bin-Dicator
R-H = 120 VAC, 1SPDT
RA-H = 120 VAC, 2SPDT
RB-H = 240 VAC, 1SPDT
RC-H = 240 VAC, 2SPDT
RD-H = 24 VDC, 1SPDT
RE-H = 24 VDC, 2SPDT
RF-H = 24 VAC, 1SPDT
RG-H = 24 VAC, 2SPDT
R-HM = 120 VAC, 1SPDT, Metric
RA-HM = 120 VAC, 2SPDT, Metric
RB-HM = 240 VAC, 1SPDT, Metric
RC-HM = 240 VAC, 2SPDT, Metric
RD-HM = 24 VDC, 1SPDT, Metric
RE-HM = 24 VDC, 2SPDT, Metric
RF-HM = 24 VAC, 1SPDT, Metric
RG-HM = 24 VAC, 2SPDT, Metric


Note 1. For PowerPack ordering: for powder coated aluminum and 1-1/4 in. NPT order by model number only.

Hazardous Location

Standard Roto-Bin-Dicator
RX-H = 120 VAC, 1SPDT
RXA-H = 120 VAC, 2SPDT
RXB-H = 240 VAC, 1SPDT
RXC-H = 240 VAC, 2SPDT
RXD-H = 24 VDC, 1SPDT
RXE-H = 24 VDC, 2SPDT
RXF-H = 24 VAC, 1SPDT
RXG-H = 24 VAC, 2SPDT
RX-HM = 120 VAC, 1SPDT, Metric with ATEX and IEC approvals
RXA-H M= 120 VAC, 2SPDT, Metric with ATEX and IEC approvals
RXB-HM = 240 VAC, 1SPDT, Metric with ATEX and IEC approvals
RXC-HM = 240 VAC, 2SPDT, Metric with ATEX and IEC approvals
RXD-HM = 24 VDC, 1SPDT, Metric with ATEX and IEC approvals
RXE-HM = 24 VDC, 2SPDT, Metric with ATEX and IEC approvals
RXF-HM = 24 VAC, 1SPDT, Metric with ATEX and IEC approvals
RXG-HM = 24 VAC, 2SPDT, Metric with ATEX and IEC approvals

Note 14: For Hazardous Location models that require extended ambient temperature -40° to 113°F (-40° to 45°C), add suffix 'T' to model number.
Example: RX-HT

ROTO-BIN-DICATOR - ORIGINAL - PART TWO

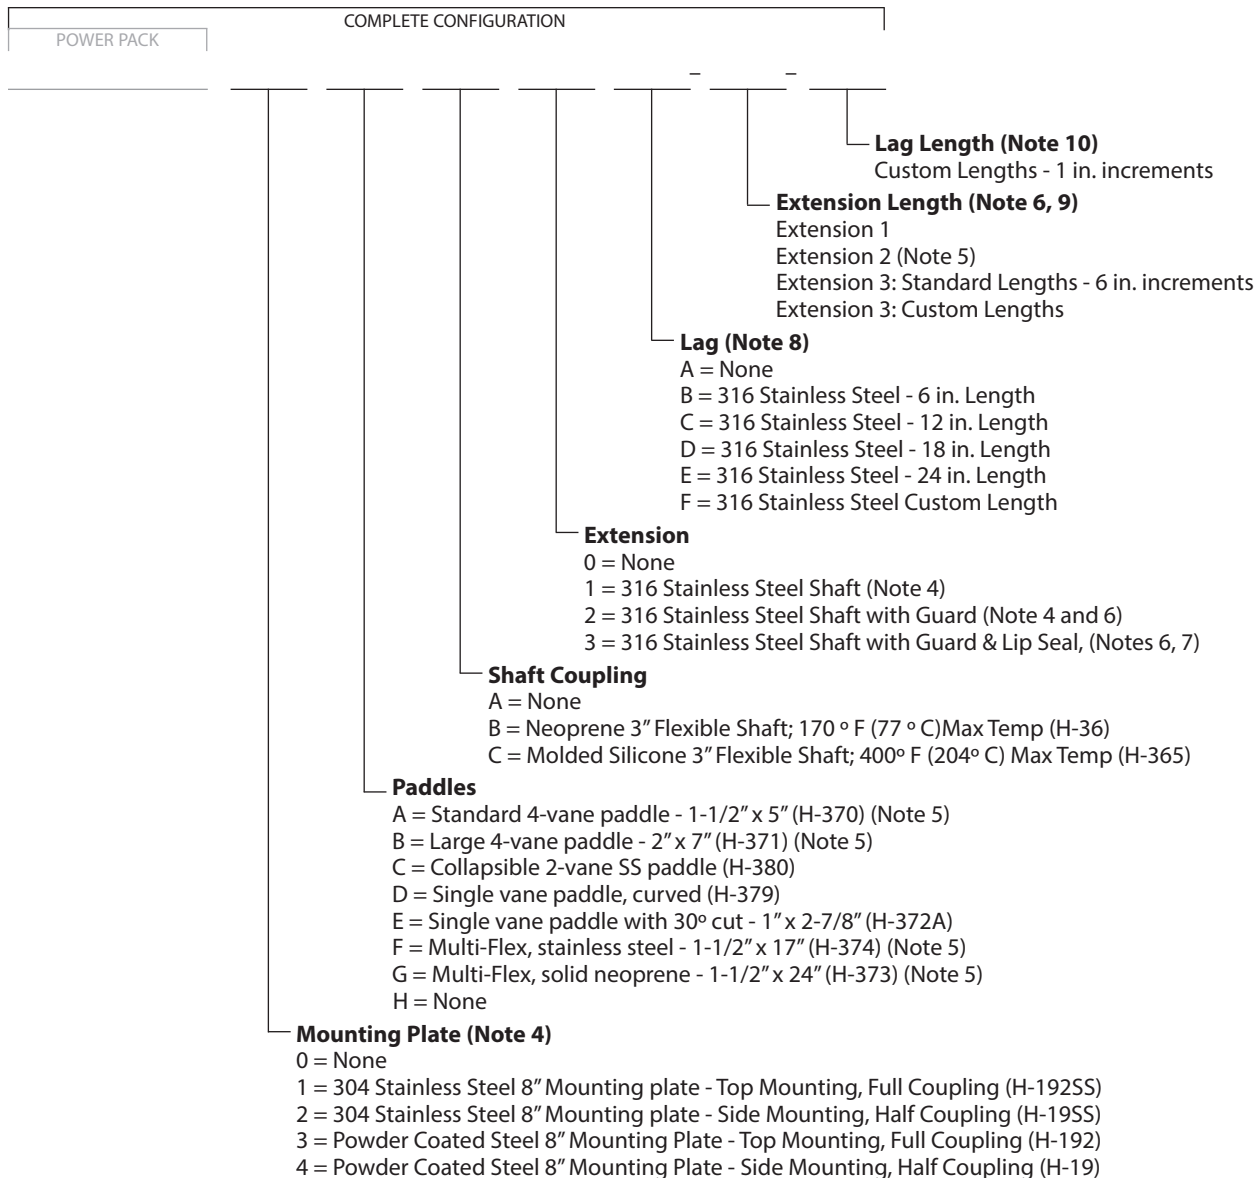

Notes:

- Hazardous location approval not available with stainless steel Housing Finish or electroless nickel plated aluminum Housing Finish.
- Function Test FOB not available with stainless steel Housing Finish
- For Mounting Plates Process Fitting must be X1, X2, or C2. Extensions 1 and 2 must use Mounting Plate 1 or 3 (Top Mounted)
- Mounting plate is required.
- Shaft guard length will be 2 in. (5 cm) shorter than extension length unless otherwise noted
- Process Fitting cannot be X1 or X2 and maximum length is 36 in. (91 cm) and if used with Extension, the maximum total length is 48 in. (122 cm)
- Lag not available with process fitting X1 or X2, and if used with Extension, the maximum total length is 48 in. (122 cm)
- Maximum extension length is 180 in. (4.6 m), minimum length is 3 in. (7.6 cm); leave blank if not used.
- Maximum lag length is 24 inches, minimum length 1 in. (2.5 cm); leave blank if not used
- EPDM Flat gasket is included for Process Fittings with straight threads.
- X2 Process Fitting and Stainless Steel Housing Finish can only be ordered together.
- M2 and N2 Process Fitting only available with C, D, E, F and G Paddles.

2014 All rights reserved.
All data subject to change without notice.